

# RotorLed 12

► Ø 155 mm ► Recessed lamp ► 25.5 W

PROGETTO  
LUCE   
Made in Italy 



Cornice frontale: alluminio verniciato  
Corpo: metallo verniciato  
Fissaggio: tramite viti Ø 4/5 mm (non fornite)  
Montaggio: incasso  
Optica: riflettore lenti in PMMA 10°/25°/35°/45°/60°  
Cavo di alimentazione: incluso 40 cm di cavo 3 poli (3x1,5 mm<sup>2</sup>) Ø esterno 5 mm  
Cavo velocità di rotazione: incluso 100 cm di cavo schermato 3x0,5 mm<sup>2</sup>  
Alimentazione: 24 Vdc  
Potenza massima assorbita: 25.5 W  
Temperatura di utilizzo: -30°C ÷ +50°C  
Peso: 1.8 Kg  
Normativa: prodotti in conformità alle vigenti norme Europee

Frontal frame: painted aluminium  
Body: painted metal  
Fixing: stainless steel or painted Ø 5 mm (not included)  
Installation: recessed  
Optics: reflectors lens in PMMA 10°/25°/35°/45°/60°  
Power supply cable: included 40cm of cable 3 poles (3x1,5mm<sup>2</sup>) external Ø 5mm  
Check rotation speed cable: included 100 cm of shielded cable 3x0,5 mm<sup>2</sup>  
Power supply: 24 Vdc  
Maximum absorbed power: 25.5 W  
Working temperature: -30°C ÷ +50°C  
Weight: 1.8 Kg  
Norms: products comply European norms



**Personalizzazione**  
Colore Led personalizzabile  
**Customization**  
Customizable color LEDs



**Colori standard**  
Standard colour



Bianco  
White



Grigio  
Grey



Nero  
Black

Altri colori RAL a richiesta  
Other RAL color upon request

**Finiture disponibili**  
Finishes available



Ottone satinato  
Satin Brass



Ottone lucido  
Polished brass



Ottone brunito  
Burnished Brass



Nikel satinato  
Satin nickel




Cromo lucido  
Polished chrome



RoHS



## Composizione Led luce per gioielli Composition Led light for jewels

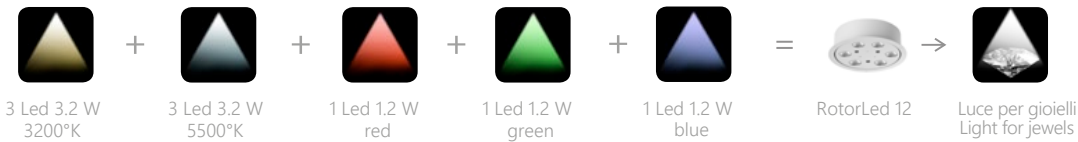

Codici RotorLed 12  
Code RotorLed 12

| Lenti / Lens                     | 10°           | 25°           | 35°           | 45°           | 60°           |
|----------------------------------|---------------|---------------|---------------|---------------|---------------|
| Nero / Black                     | RL3 12R N 10  | RL3 12R N 25  | RL3 12R N 35  | RL3 12R N 45  | RL3 12R N 60  |
| Bianco / White                   | RL3 12R B 10  | RL3 12R B 25  | RL3 12R B 35  | RL3 12R B 45  | RL3 12R B 60  |
| Grigio / Grey                    | RL3 12R G 10  | RL3 12R G 25  | RL3 12R G 35  | RL3 12R G 45  | RL3 12R G 60  |
| Ottone satinato / Satin Brass    | RL3 12R OS 10 | RL3 12R OS 25 | RL3 12R OS 35 | RL3 12R OS 45 | RL3 12R OS 60 |
| Ottone lucido / Polished brass   | RL3 12R OL 10 | RL3 12R OL 25 | RL3 12R OL 35 | RL3 12R OL 45 | RL3 12R OL 60 |
| Ottone brunito / Burnished Brass | RL3 12R OB 10 | RL3 12R OB 25 | RL3 12R OB 35 | RL3 12R OB 45 | RL3 12R OB 60 |
| Nikel satinato / Satin nickel    | RL3 12R NS 10 | RL3 12R NS 25 | RL3 12R NS 35 | RL3 12R NS 45 | RL3 12R NS 60 |
| Cromo lucido / Polished chrome   | RL3 12R CL 10 | RL3 12R CL 25 | RL3 12R CL 35 | RL3 12R CL 45 | RL3 12R CL 60 |



Lumen  
+/- 3442 Lm



CRI > 90 - 95



Dimmerabile  
No  
Dimmable  
No



### Importante!

La temperatura del metallo in prossimità del LED non deve superare il valore di 50°C.

RotorLed ha necessità di almeno 15 cm per lato di spazio libero, areato e non completamente chiuso.

Il cavo di connessione alla pulsantiera di comando della rotazione può essere prolungato sino a 30 mt con cavo schermato.



Specifiche LED  
Cree XPG 135 lm/W

LED type  
Cree XPG 135 lm/W



Garanzia  
RotorLed: 3 anni  
Alimentatore: 1 anno

Warranty  
RotorLed: 3 years  
Power supply: 1 year

### Remarks!

The temperature of the metal close to the led should not exceed 50°C.

RotorLed needs at least 15 cm on each side of free space, ventilated and not completely closed.


The cable connecting the switch controlling the rotation may be extended up to 30 m with shielded cable.



Dissipazione  
Attiva  
Dissipation  
Active



Disegno tecnico  
Technical drawing

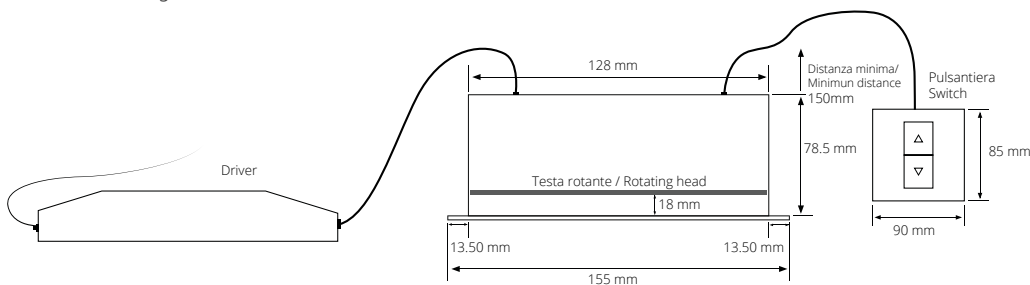

Cut hole:  
Ø 129 mm