

RotorCube 22

► 280 x 280 mm ► Ceiling lamp ► 45 W

PROGETTO
LUCE



Cornice frontale: alluminio verniciato
Corpo: metallo verniciato
Fissaggio: tramite tasselli non forniti Ø 6 mm
Montaggio: plafone
Ottica: riflettore lenti in PMMA 10°/25°/35°/45°/60°
Cavo di alimentazione: incluso 40 cm 3 poli (3x1,5 mm²) Ø esterno 5 mm
Cavo velocità di rotazione: incluso 100 cm di cavo schermato 3x0,5 mm²
Alimentazione: 24 Vdc
Potenza massima assorbita: 45 W
Temperatura di utilizzo: -30°C ÷ +50°C
Peso: 5.2 Kg
Normativa: prodotti in conformità alle vigenti norme Europee

Frontal frame: painted aluminium
Body: painted metal
Fixing: with dowels not included Ø 6 mm
Installation: ceiling
Optics: reflectors lens in PMMA 10°/25°/35°/45°/60°
Power supply cable: included 40 cm of cable 3 poles (3x1,5mm²) external Ø 5mm
Check rotation speed cable: included 100 cm of shielded cable 3x0,5 mm²
Power supply: 24 Vdc
Maximum absorbed power: 45 W
Working temperature: -30°C ÷ +50°C
Weight: 5.2 Kg
Norms: products comply European norms



Personalizzazione

Colore Led personalizzabile

Customization

Customizable color LEDs



Colori standard Standard colour



Bianco
White



Grigio
Grey



Nero
Black

Altri colori RAL a richiesta
Other RAL color upon request

Finiture disponibili Finishes available



Ottone satinato
Satin Brass



Ottone lucido
Polished brass



Ottone brunito
Burnished Brass



Nikel satinato
Satin nickel




Cromo lucido
Polished chrome



RoHS



Composizione Led luce per gioielli Composition Led light for jewels

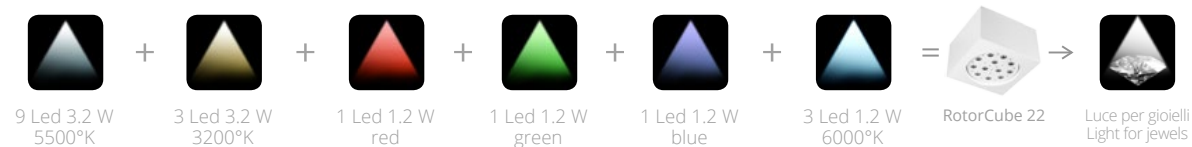

Codici RotorCube 22 Code RotorCube 22

Lenti / Lens	10°	25°	35°	45°	60°
Nero / Black	RC3 22R N 10	RC3 22R N 25	RC3 22R N 35	RC3 22R N 45	RC3 22R N 60
Bianco / White	RC3 22R B 10	RC3 22R B 25	RC3 22R B 35	RC3 22R B 45	RC3 22R B 60
Grigio / Grey	RC3 22R G 10	RC3 22R G 25	RC3 22R G 35	RC3 22R G 45	RC3 22R G 60
Ottone satinato / Satin Brass	RC3 22R OS 10	RC3 22R OS 25	RC3 22R OS 35	RC3 22R OS 45	RC3 22R OS 60
Ottone lucido / Polished brass	RC3 22R OL 10	RC3 22R OL 25	RC3 22R OL 35	RC3 22R OL 45	RC3 22R OL 60
Ottone brunito / Burnished Brass	RC3 22R OB 10	RC3 22R OB 25	RC3 22R OB 35	RC3 22R OB 45	RC3 22R OB 60
Nikel satinato / Satin nickel	RC3 22R NS 10	RC3 22R NS 25	RC3 22R NS 35	RC3 22R NS 45	RC3 22R NS 60
Cromo lucido / Polished chrome	RC3 22R CL 10	RC3 22R CL 25	RC3 22R CL 35	RC3 22R CL 45	RC3 22R CL 60



Lumen
+/- 6075 Lm



CRI > 90 - 95



Dimmerabile
no
Dimmable
no



Importante!

La temperatura del metallo in prossimità del LED non deve superare il valore di 50°C.

RotorLed ha necessità di almeno 15 cm per lato di spazio libero, areato e non completamente chiuso.

Il cavo di connessione alla pulsantiera di comando della rotazione può essere prolungato sino a 30 mt con cavo schermato.



Specifiche LED
Cree XPG 135 lm/W

LED type
Cree XPG 135 lm/W



Garanzia
RotorCube: 3 anni
Alimentatore: 2 anni

Warranty
RotorCube: 3 years
Power supply: 2 years

Remarks!

The temperature of the metal close to the led should not exceed 50°C.

RotorLed needs at least 15 cm on each side of free space, ventilated and not completely closed.

The cable connecting the switch controlling the rotation may be extended up to 30 m with shielded cable.



Dissipazione
Attiva
Dissipation
Active



Disegno tecnico
Technical drawing

