

RotorLed 18

▶ Ø 224 mm ▶ Recessed lamp ▶ 36.5 W

PROGETTO
LUCE



Cornice frontale: alluminio verniciato

Corpo: metallo verniciato

Fissaggio: tramite viti Ø 4/5 mm (non fornite)

Montaggio: incasso

Ottica: riflettore lenti in PMMA 10°/25°/35°/45°/60°

Cavo di alimentazione: incluso 40 cm 3 poli (3x1,5 mm²) Ø esterno 5 mm

Cavo velocità di rotazione: incluso 100 cm di cavo schermato 3x0,5 mm²

Alimentazione: 24 Vdc

Potenza massima assorbita: 36.5 W

Temperatura di utilizzo: -30°C ÷ +50°C

Peso: 2.8 Kg

Normativa: prodotti in conformità alle vigenti norme Europee

Frontal frame: painted aluminium

Body: painted metal

Fixing: stainless steel or painted Ø 5 mm (not included)

Installation: recessed

Optics: reflectors lens in PMMA 10°/25°/35°/45°/60°

Power supply cable: included 40cm of cable 3 poles (3x1,5mm²) external Ø 5mm

Check rotation speed cable: included 100 cm of shielded cable 3x0,5 mm²

Power supply: 24 Vdc

Maximum absorbed power: 36.5 W

Working temperature: -30°C ÷ +50°C

Weight: 2.8 Kg

Norms: products comply European norms



Personalizzazione

Colore Led personalizzabile

Customization

Customizable color LEDs



Colori standard

Standard colour



Bianco
White



Grigio
Grey



Nero
Black

Altri colori RAL a richiesta
Other RAL color upon request

Finiture disponibili

Finishes available



Ottone satinato
Satin Brass



Ottone lucido
Polished brass



Ottone brunito
Burnished Brass



Nikel satinato
Satin nickel




Cromo lucido
Polished chrome





Composizione Led luce per gioielli
Composition Led light for jewels

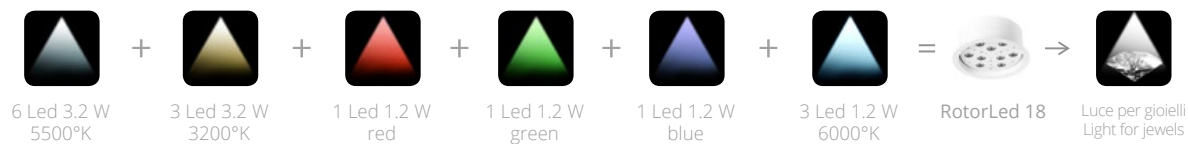

Codici RotorLed 18
Code RotorLed 18

Lenti / Lens	10°	25°	35°	45°	60°
Nero / Black	RL3 18R N 10	RL3 18R N 25	RL3 18R N 35	RL3 18R N 45	RL3 18R N 60
Bianco / White	RL3 18R B 10	RL3 18R B 25	RL3 18R B 35	RL3 18R B 45	RL3 18R B 60
Grigio / Grey	RL3 18R G 10	RL3 18R G 25	RL3 18R G 35	RL3 18R G 45	RL3 18R G 60
Ottone satinato / Satin Brass	RL3 18R OS 10	RL3 18R OS 25	RL3 18R OS 35	RL3 18R OS 45	RL3 18R OS 60
Ottone lucido / Polished brass	RL3 18R OL 10	RL3 18R OL 25	RL3 18R OL 35	RL3 18R OL 45	RL3 18R OL 60
Ottone brunito / Burnished Brass	RL3 18R OB 10	RL3 18R OB 25	RL3 18R OB 35	RL3 18R OB 45	RL3 18R OB 60
Nikel satinato / Satin nickel	RL3 18R NS 10	RL3 18R NS 25	RL3 18R NS 35	RL3 18R NS 45	RL3 18R NS 60
Cromo lucido / Polished chrome	RL3 18R CL 10	RL3 18R CL 25	RL3 18R CL 35	RL3 18R CL 45	RL3 18R CL 60



Lumen
+/- 4927 Lm



CRI > 90 - 95



Dimmerabile
no
Dimmable
no



Importante!

La temperatura del metallo in prossimità del LED non deve superare il valore di 50°C.

RotorLed ha necessità di almeno 15 cm per lato di spazio libero, areato e non completamente chiuso.

Il cavo di connessione alla pulsantiera di comando della rotazione può essere prolungato sino a 30 mt con cavo schermato.



Specifiche LED
Cree XPG 135 lm/W

LED type
Cree XPG 135 lm/W



Garanzia
RotorLed: 3 anni
Alimentatore: 2 anni

Warranty
RotorLed: 3 years
Power supply: 2 years

Remarks!

The temperature of the metal close to the led should not exceed 50°C.

RotorLed needs at least 15 cm on each side of free space, ventilated and not completely closed.

The cable connecting the switch controlling the rotation may be extended up to 30 m with shielded cable.



Dissipazione
Attiva
Dissipation
Active



Disegno tecnico
Technical drawing

