

StroboLed Cube Recessed DW

PROGETTO
LUCE

Made in Italy

► 230 x 230 mm ► Recessed lamp ► 48 W



Corpo: metallo verniciato
Fissaggio: viti Ø 6 mm (non fornite)
Montaggio: plafone
Optica: riflettore lenti in PMMA 20°/40°
Cavo di alimentazione: non incluso
Alimentazione: 24 Vdc
Potenza massima assorbita: 48 W
Temperatura di utilizzo: -30°C ÷ +50°C
Peso: 560 gr
Normativa: prodotti in conformità alle vigenti norme Europee

Body: painted metal
Fixing: screws Ø 5 mm (not supplied)
Installation: ceiling
Optics: reflectors lens in PMMA 20°/40°
Power supply cable: not included
Power supply: 24 Vdc
Maximum absorbed power: 48 W
Working temperature: -30°C ÷ +50°C
Weight: 560 gr
Norms: products comply European norms



Personalizzazione
Colore Led personalizzabile
Customization
Customizable color LEDs



Colori standard
Standard colors



Bianco
White



Grigio
Grey



Nero
Black

Altri colori RAL a richiesta
Other RAL colors on request

Finiture disponibili
Finishes available



Ottone satinato
Satin brass



Ottone lucido
Polished brass



Ottone brunito
Brushed brass



Nikel satinato
Satin nickel




Cromo lucido
Polished chrome





Composizione LED luce per gioielli
Composition LED light for jewels

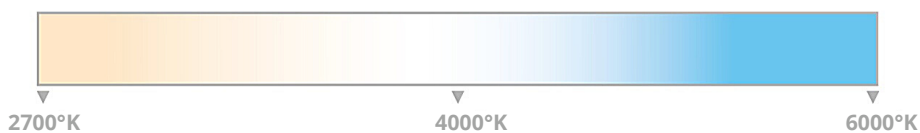

Codici StroboLed Cube Incasso DW
Code StroboLed Cube Recessed DW

Lenti/Lens	20°	40°
Nero / Black	SCRDW N 20	SCRDW N 40
Bianco / White	SCRDW B 20	SCRDW B 40
Grigio / Grey	SCRDW G 20	SCRDW G 40
Ottone Satinato / Satin Brass	SCRDW OS 20	SCRDW OS 40
Ottone Lucido / Polished Brass	SCRDW OL 20	SCRDW OL 40
Ottone Brunito / Brushed Brass	SCRDW OB 20	SCRDW OB 40
Nikel Satinato / Satin Nickel	SCRDW NS 20	SCRDW NS 40
Cromo Lucido / Polished Chrome	SCRDW CL 20	SCRDW CL 40



Lumen
+/- 5200 Lm/m
Massima potenza
Max power



IRC/CRI > 90 - 95



Dimmerabile
Si
Dimmable
Yes



Importante!
La temperatura del metallo in prossimità del LED non deve superare il valore di 50°C.

Il cavo di connessione alla pulsantiera di comando della rotazione può essere prolungato sino a 30 mt con cavo schermato.

Remarks!
The temperature of the metal close to the led should not exceed 50°C.

The cable connecting the switch controlling the rotation may be extended up to 30 m with shielded cable.



Specifiche LED
Cree XPG 110 lm/W
LED type
Cree XPG 110 lm/W



Garanzia
StroboLed: 3 anni
Alimentatore: 1 anno
Warranty
StroboLed: 3 years
Power supply: 1 year





Dissipazione
Passiva
Dissipation
Passive



Telecomando
Remote control



Disegno tecnico
Technical drawing

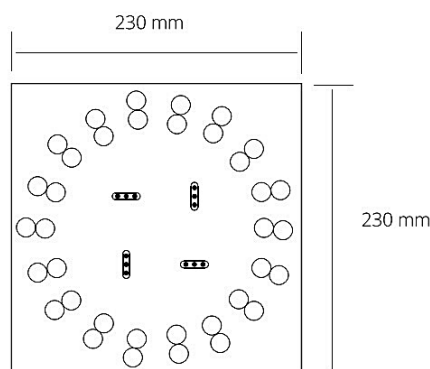

Cut hole:
Ø 210 mm

